




150 lb x 0.05lb  
300 lb x 0.1 lb  
600 lb x 0.2 lb

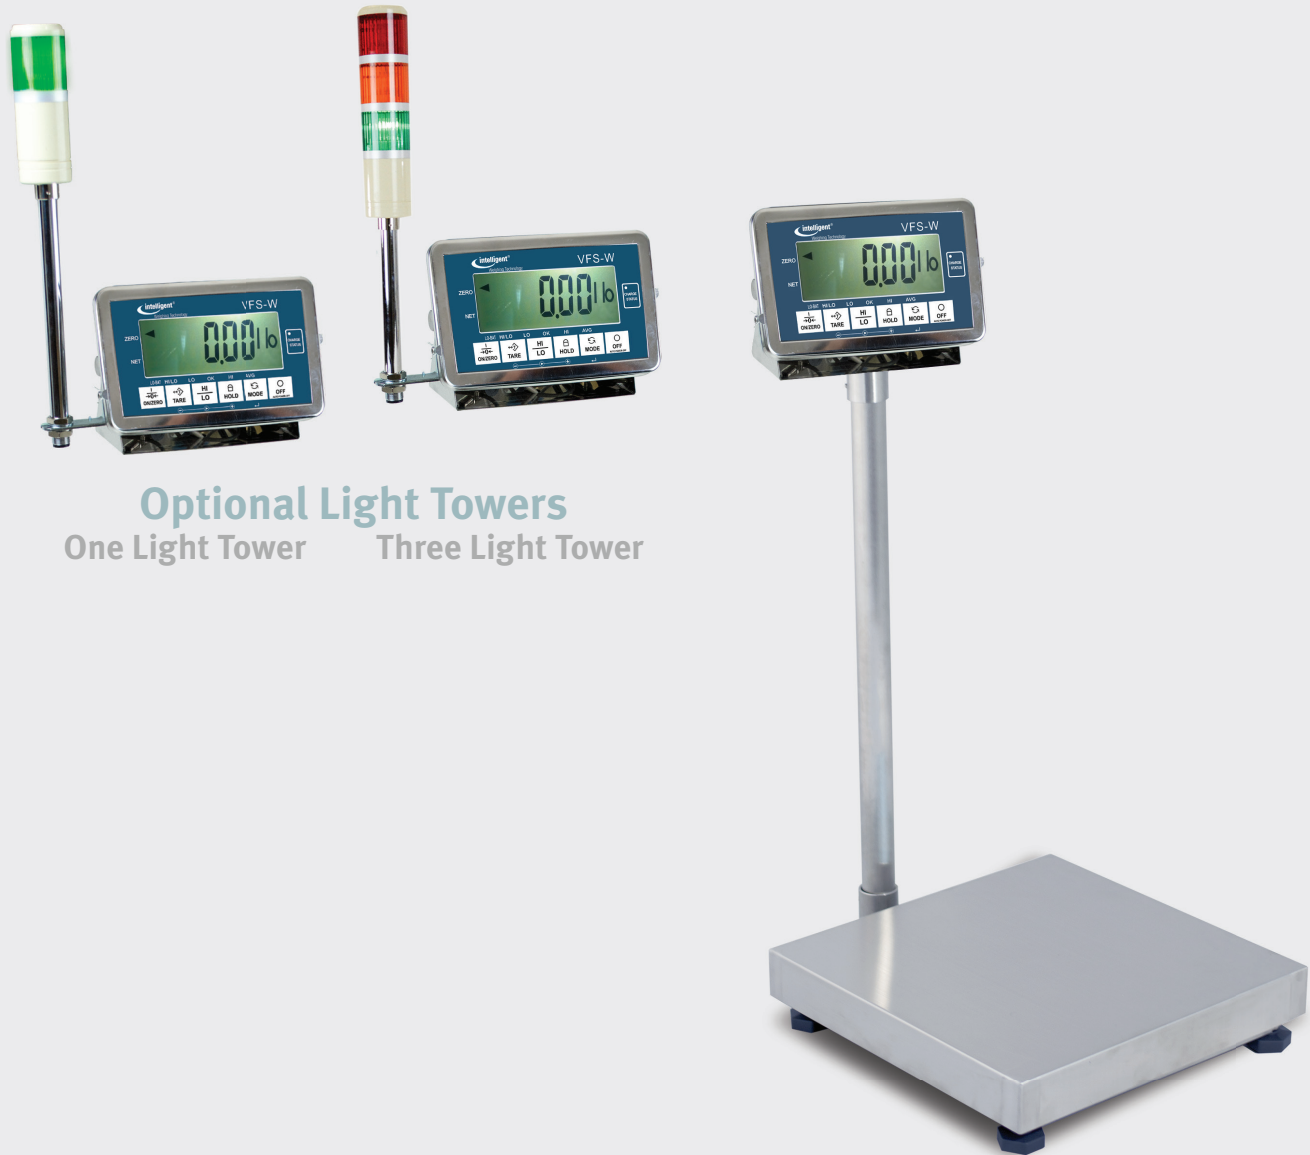

**Optional Light Towers**  
One Light Tower    Three Light Tower

- STAINLESS STEEL WASHDOWN CONSTRUCTION
- IP67 / NEMA 4X
- READS IN: LB, KG, G, OZ
- OPTIONAL STAINLESS STEEL WHEEL KIT
- EXTERNAL AC & RECHARGEABLE BATTERY
- OPTIONAL LIGHT TOWERS

PART NUMBER	VFSW - 150-16	VFSW - 300-16	VFSW - 300-24	VFSW - 600-24
Capacity	132 lb / 60 kg	330 lb / 150 kg	660 lb / 300 kg	1,323 lb / 600 kg
Readability	0.01 kg / 0.02 lb / 0.5 oz	0.02 kg / 0.05 lb / 1 oz	0.05 kg / 0.1 lb / 2 oz	0.1 kg / 0.1 lb/ 2 oz
Divisions	6,000	7,500	6,000	6,000
Weighing Units / Functions	kg, lb, g, oz			
Stabilization Time (seconds)	< 1.5			
Tare Range	To capacity by subtraction			
Power Source	Built-in rechargeable battery or external power adapter (included)			
Construction	Stainless steel platform, pillar, indicator and housing (Aluminum load receiving structure)			
Display	2 inch / 51 mm wide viewing angle LCD			
Platform Size (W X H X D)	16.7 x 4.7 x 20.7 inches / 425 x 120 x 525 mm	24 x 24 x 6 inches / 610 x 610 x 152 mm		
Dimensions (W X H X D)	16.7 x 36.8 x 20.7 inches / 425 x 935 x 525 mm	24 x 24 x 34 inches / 610 x 610 x 864 mm		
Operating Environment	32° ~ 104° F non condensing R.H. ≤85%			
Net Weight	26 lb / 12 kg	49 lb / 23 kg		
Shipping Weight	34 lb / 16 kg	55 lb / 25 kg		
NEMA / IP Rating	NEMA 4X / IP 65			
Options	Stainless Steel Wheel Kit, Light Towers			

FEATURES	BENEFITS
All stainless steel housing and pan	Easy to clean for food processing or harsh environments
Heavy duty construction	Will withstand harsh industrial operation
Large backlit display	Can be easily read in less than ideal conditions
Reads in: kg, lbs, oz	Flexibility of operation
Built-in rechargeable battery or external power adapter	Portability - battery lasts a minimum of 100 hours (without back light)
Automatic Zero tracking	Assures that you always start weighing at zero
Automatic power save	Conserves battery power
Low battery indicator	Alerts you to charge the battery, saving downtime
Adjustable stainless steel feet with rubber inserts	Scale remains level for accurate results on uneven working surfaces - anti-slip



**Optional Light Towers**  
One Light Tower      Three Light Tower